



## Picture of changing drum chip for Xerox WC5016/5020



1.need a plum which used to dismantle the drum chip

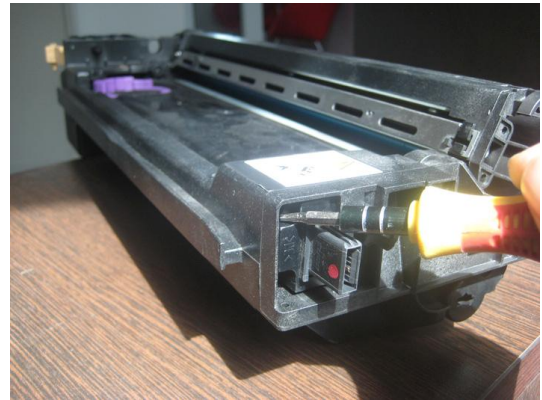


2.Dismantle the seats of the drum chip according with the picture showed.

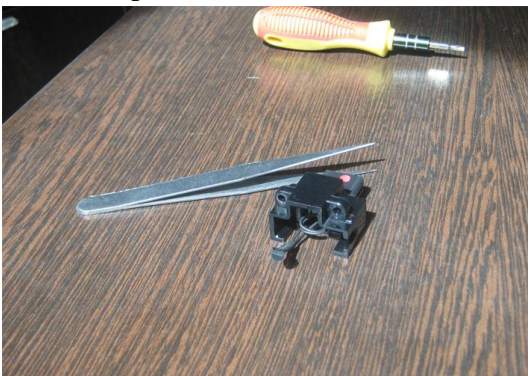


3.use tweezer to dismantlthe OEM IC device plug




4.Use tweezer poke the inside clip then take the of the IC out

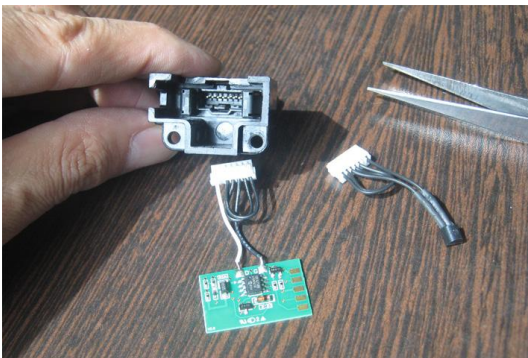

5.Perpare the new chip .

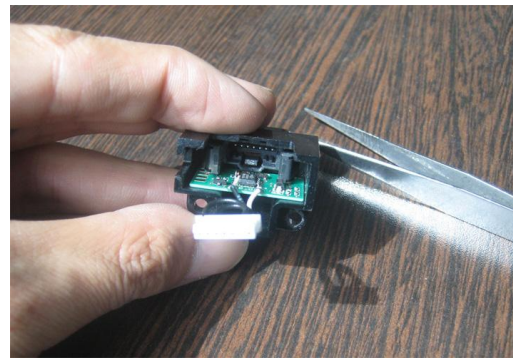

6.F

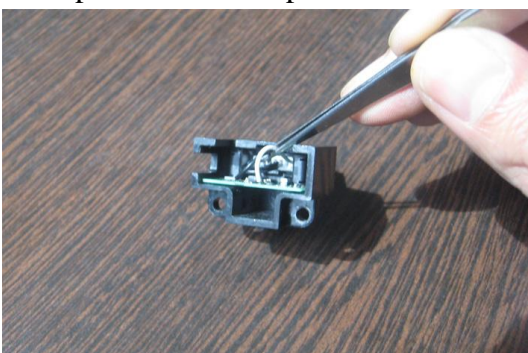

7.Insert the plug of new chip into chip seat.



8.At last, put the intact seat into the toner cartridge.